




## RCCN 日成L中间套管 L Butt Connectors



紫铜管端子  
 材质: 紫铜  
 表面电镀: 镀锡  
 Copper tube terminal  
 Material: Copper Surface  
 plating: Tin

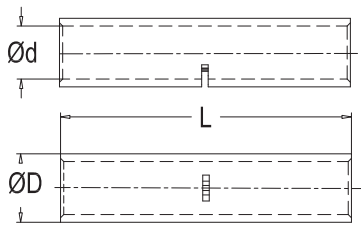

型号 Item No.	尺寸 DIMENSION		
	φD	φd	L
BL-1.5	3.7	1.8	20.0
BL-2.5	4.0	2.4	20.0
BL-4	4.8	3.1	20.0
BL-6	5.5	3.8	20.0
BL-10	6.2	4.5	20.0
BL-16	7.1	5.4	40.0
BL-25	8.8	6.8	45.0
BL-35	10.6	8.2	45.0
BL-50	12.4	9.5	45.0
BL-70	14.7	11.2	50.0
BL-95	17.4	13.5	50.0
BL-120	19.4	15.0	55.0
BL-150	21.2	16.5	60.0
BL-185	23.5	18.5	65.0
BL-240	26.5	21.0	80.0
BL-300	30.0	23.5	85.0
BL-400	36.5	28.5	90.0
BL-500	39.0	30.0	100.0
BL-550	41.4	31.7	100.0
BL-630	45.0	35.0	110.0
BL-800	50.6	39.0	150.0
BL-1000	56.2	43.0	170.0

规格 Item No.	导线截面 AWG	mm <sup>2</sup>	最大电流	φD	φd	L	单位
BNH1.25	22-16	0.5-1.5	19A	3.3	2.0	8.0	PCS
BNH2	16-14	1.5-2.5	27A	3.95	2.5	8.0	PCS
BNH5.5	12-10	4-6	48A	5.5	3.9	8.5	PCS
BNH8	#8	6-10	62A	7.0	4.8	9.5	PCS
BNH14	#6	10-16	88A	8.9	5.9	11.0	PCS
BNH22	#4	16-25	115A	11.3	7.8	13.5	PCS
BNH38	#2	35-50	160A	13.2	9.5	16.5	PCS
BNH60	1/0	50-70	215A	15.3	11.4	19.0	PCS
BNH70	2/0	70-95	235A	17.5	13.3	19.0	PCS
BNH80	3/0	95-120	255A	19.5	14.5	19.5	PCS
BNH100	4/0	120-150	300A	22.1	16.4	20.0	PCS
BNH150	(250/300)	150-185	395A	26.0	19.0	27.0	PCS
BNH180	(300/350)	185-240	440A	28.5	21.0	28.5	PCS
BNH200	(400/500)	240-300	470A	32.0	24.0	32.0	PCS
BNH325	(500/600)	300-400	650A	37.0	28.0	37.0	PCS